

MOTORSCHUTZBÜGEL GUARD

Crash bar | Arceau de sécurité | Barra de choque | Barra d'urto









Art.-Nr: **13202-00X**



Original Schraube entfällt!
Original screw omitted!
Vis d'origine omise!





LEGENDE/KEY/FILE LÉGENDE

-  **Anbau Tipp**
Fitting tip
Astuce de montage
-  **Achtung**
Attention
Attention
-  **Vergrößerung**
Magnification
Grossissement
-  **Montagepaste**
Fitting lubricant
Lubrifiant de montage
-  **Schraube**
Screw
Vis
-  **Schraubensicherung**
Thread locking fluid
Freinilets
-  **Drehmoment**
Torque
Torque
-  **Reiniger**
Cleaner
Nettoyant




#	Bauteil component composant	DE Die Farben der Abbildungen dienen nur der Veranschaulichung. EN The colors are for illustrating purposes only. FR Les couleurs utilisées sont à titre indicatif seulement.	DIN	ISO	Menge quantity quantité
1	Zylinderschraube (schwarz) / Cylinder head screw (black)	M8x50 (Torx)	912SZ	4762	2
2	Zylinderschraube (schwarz) / Cylinder head screw (black)	M8x55 (Torx)	912SZ	4762	4
3	Alu-Distanzhülse (schwarz eloxiert) / Alu sleeve (black anodized)	ØD 22,0 - Ød 10,5 - h 25,0 mm			4
4	Alu-Distanzhülse (schwarz eloxiert) / Alu sleeve (black anodized)	ØD 22,0 - Ød 10,5 - h 30,0 mm			2
5	U-Scheibe (schwarz) / Washer (black)	M8	9021SA2	7093	6
6	Rechter & linker Schutzbügel) / Right & left crash protect				2
7	Schraubensicherung / Thread locking fluid				1

LINKS/LEFT

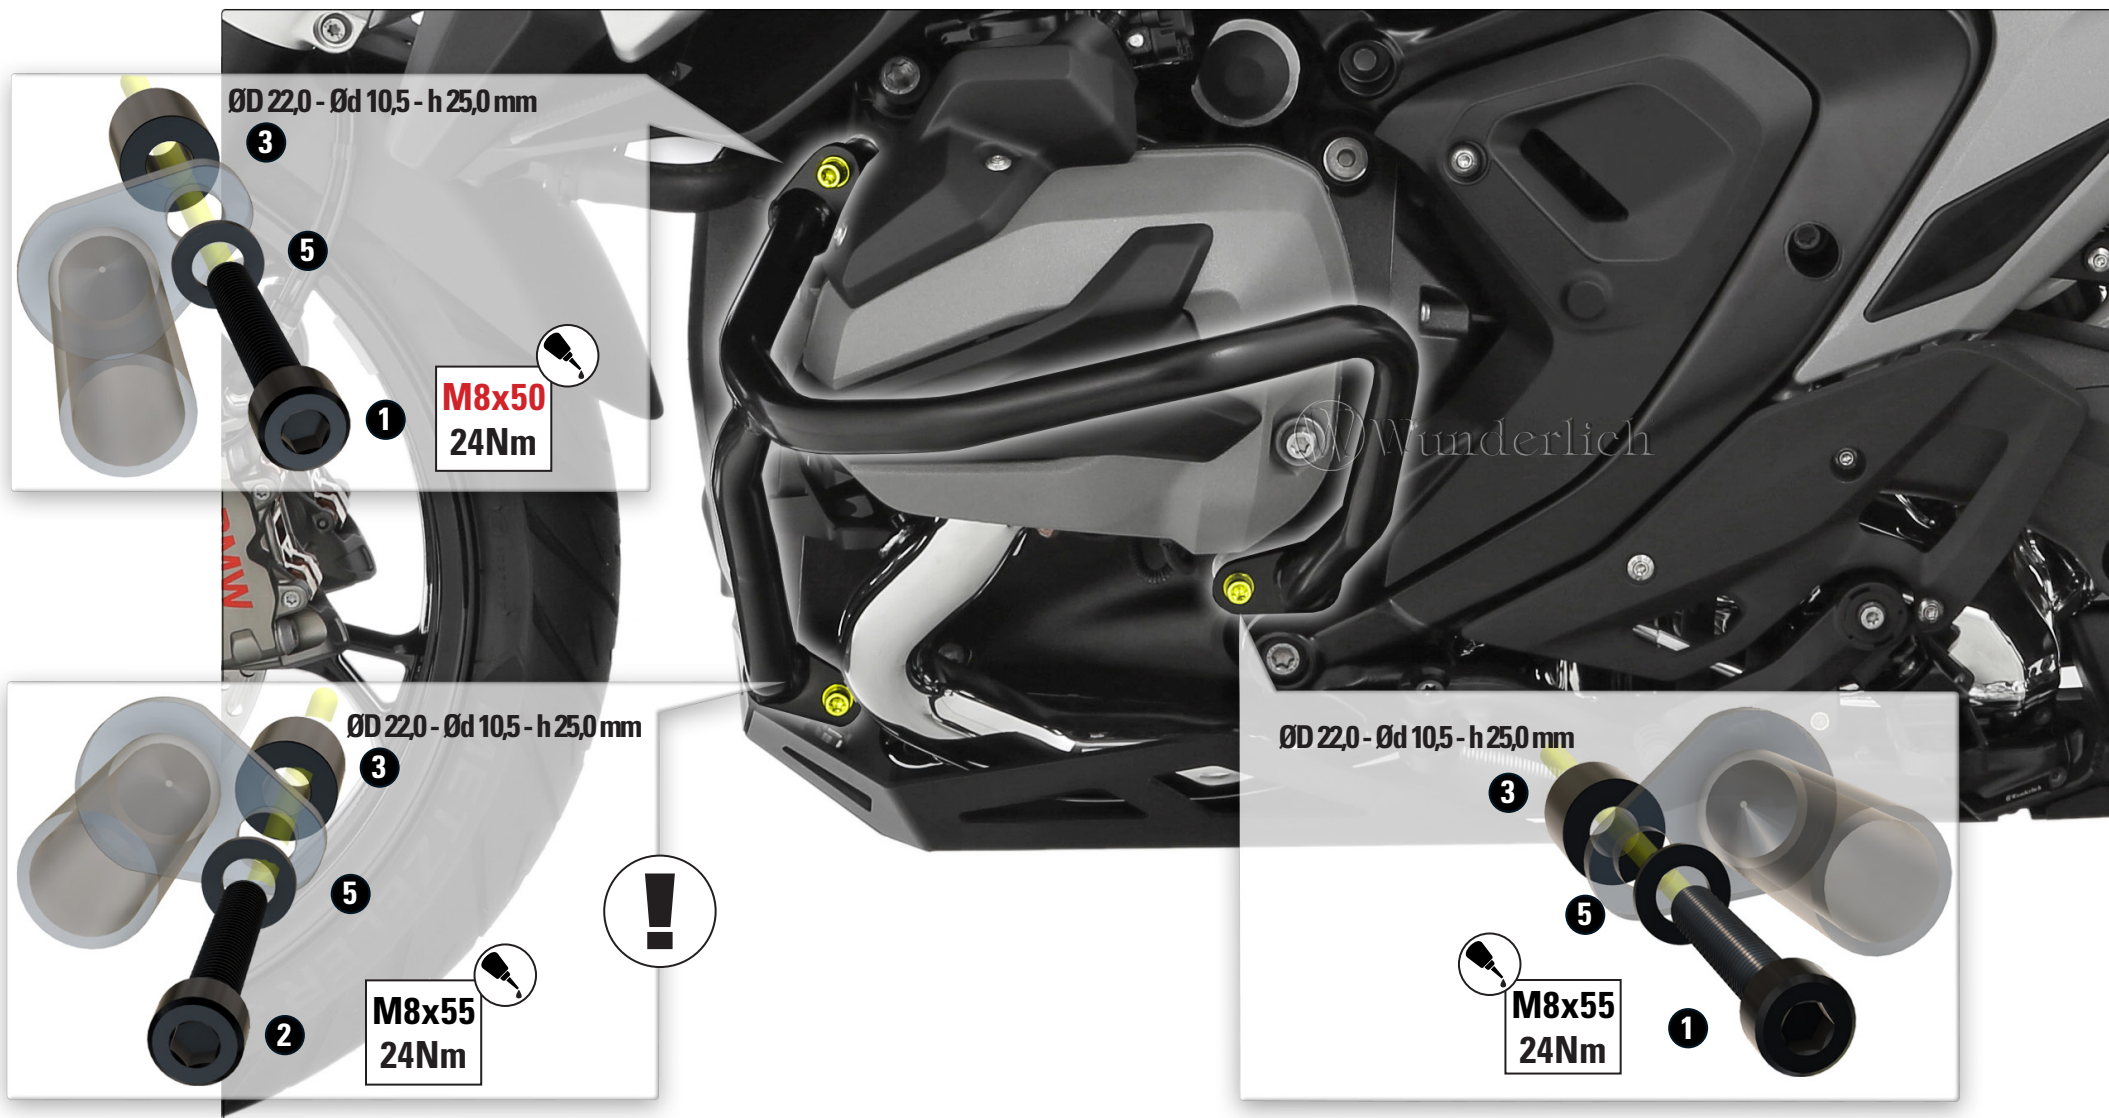

RECHTS/RIGHT

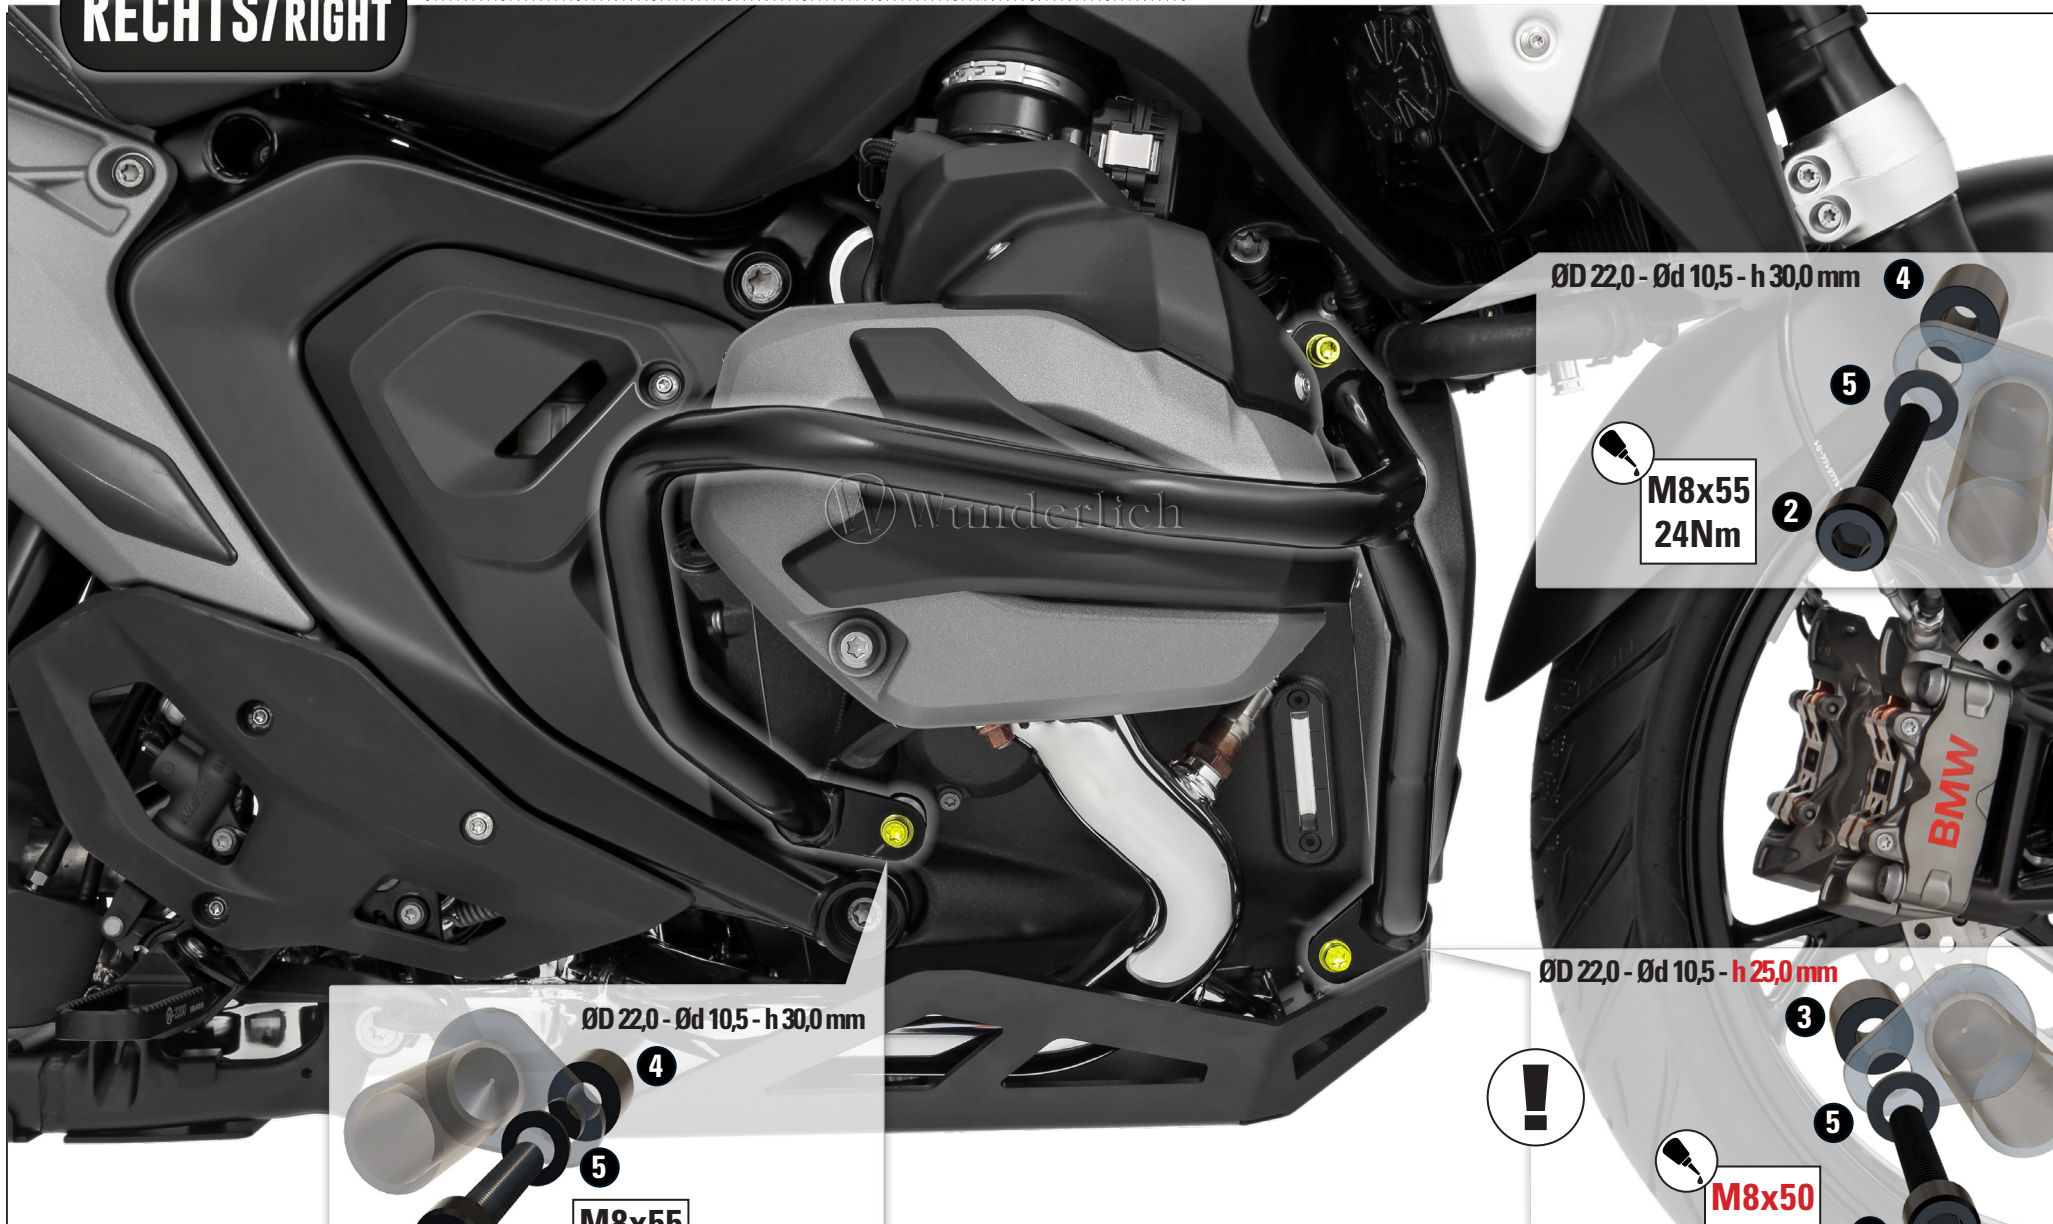

ØD 22,0 - Ød 10,5 - h 30,0 mm

4

5

2

**M8x55
24Nm**

ØD 22,0 - Ød 10,5 - h 30,0 mm

4

5

2

**M8x55
24Nm**

ØD 22,0 - Ød 10,5 - h 25,0 mm

3

5

1

**M8x50
24Nm**